



# Makrolon® Lumen XT sheet

## Light diffusing

Makrolon® Lumen XT sheet is a translucent polycarbonate product with a textured surface on one side specifically designed for lighting lenses. It features a unique combination of high light diffusion and high light transmission through a combination of optimized surface texture and advanced diffuser technologies.

When compared to other light diffusing products such as glass and acrylic, Makrolon Lumen XT sheet has superior impact strength and toughness. Its higher flammability resistance and wider service temperature range provide an additional performance advantage over acrylic diffusers.

The wide range of standard diffusion levels offers designers the flexibility to maximize light fixtures' aesthetics and performance. Other surface textures are available for additional design options.

## Applications

Interior LED and conventional lighting fixtures

## Typical Properties\*

Property	Test Method	Units	Values
<b>PHYSICAL</b>			
Specific Gravity	ASTM D 792	-	1.2
Water Absorption, 24 hrs	ASTM D 570	%	0.15
Poisson's Ratio	ASTM E 132	-	0.38
Light Transmission			
LC3 @ 0.060~ / 0.118~	ASTM D 1003	%	90 / 85
LC5 @ 0.060~ / 0.118~	ASTM D 1003	%	88 / 77
LC7 @ 0.060~ / 0.118~	ASTM D 1003	%	79 / 62
LW3 @ 0.060~ / 0.118~	ASTM D 1003	%	93 / 90
LW5 @ 0.060~ / 0.118~	ASTM D 1003	%	90 / 81
LW7 @ 0.060~ / 0.118~	ASTM D 1003	%	82 / 67
LW9 @ 0.060~	ASTM D 1003	%	73
<b>MECHANICAL</b>			
Tensile Strength, Ultimate	ASTM D 638	psi	9,540
Tensile Strength, Yield	ASTM D 638	psi	8,840
Tensile Modulus	ASTM D 638	psi	335,000
Elongation	ASTM D 638	%	94
Flexural Strength	ASTM D 790	psi	14,200
Flexural Modulus	ASTM D 790	psi	362,000
Instrumented Impact @ 0.118~	ASTM D 3763	ft-lbs	49
<b>THERMAL</b>			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 x 10 <sup>-5</sup>
Coefficient of Thermal Conductivity	ASTM C 177	BTU-in/hr-ft <sup>2</sup> ·°F	1.35
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	274
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	287
<b>ELECTRICAL</b>			
Dielectric Constant @ 10 Hz	ASTM D 150	-	2.98
Dielectric Constant @ 60 Hz	ASTM D 150	-	2.88
Volume Resistivity	ASTM D 257	Ohm-cm	>8 x 10 <sup>15</sup>
Dissipation Factor @ 60 Hz	ASTM D 150	-	0.002
Arc Resistance, Tungsten Electrodes	ASTM D 495	Seconds	125
Dielectric Strength, in air @ 0.118"	ASTM D 149	V/mil	460
<b>FLAMMABILITY</b>			
Flame Class @ 0.060~ - 0.118~	UL 94	-	V2
Surface Flammability @ 0.060~ - 0.118~	ASTM E 162	Is	<100
Smoke Density @ 1.5 min	ASTM E 662	Ds	<100
@ 4 min			<200
@ 20 min			<200
Vertical Burn @ 12 sec @ 0.060~ - 0.118~	FAR 25.853	-	Pass
Horizontal Burn @ 2.5~ & 4.0~ @ 0.060~ - 0.118~	FAR 25.853	-	Pass
Toxic Gas Generation @ 0.060~ - 0.118~	BSS 7239	-	Pass
	SMP 800-C	-	Pass

\*Typical Properties are not intended for specification purposes

**Clausola di responsabilità del prodotto:** Le informazioni qui riportate nonché la nostra consulenza tecnico-applicativa fornita a parole, per iscritto e in base a collaudi avvengono secondo scienza e coscienza, pur non avendo valore vincolante anche e soprattutto in relazione ad eventuali diritti di protezione nei confronti di terzi. La consulenza non dispensa l'acquirente dall'eseguire un accertamento personale delle nostre note informative attuali (in particolar modo per quanto riguarda i nostri opuscoli sui dati di sicurezza e sui dati tecnici) e dei nostri prodotti in merito alla loro idoneità per gli scopi e i procedimenti perseguiti. L'applicazione, l'impiego e la lavorazione dei nostri prodotti nonché dei prodotti realizzati dall'acquirente in base alla nostra consulenza tecnico-applicativa non rientrano tra le nostre possibilità di controllo, vale a dire che ne risponde solo ed esclusivamente l'acquirente stesso. La vendita dei nostri prodotti avviene in base alle nostre attuali condizioni generali di vendita e di consegna




# Makrolon® Lumen XT sheet

## Diffusion and Transmission

Lumen XT Grade	DIFFUSION (FWHM, degrees)		% TRANSMISSION (ASTM D 1003)	
	0.060" thickness	0.118" thickness	0.060" thickness	0.118" thickness
LC3	38	53	90	85
LC5	53	77	88	77
LC7	86	135	79	62
LW3	38	53	93	90
LW5	53	77	90	81
LW7	86	135	82	67
LW9	146	-	73	-

## Correlated Color Temperature Shift

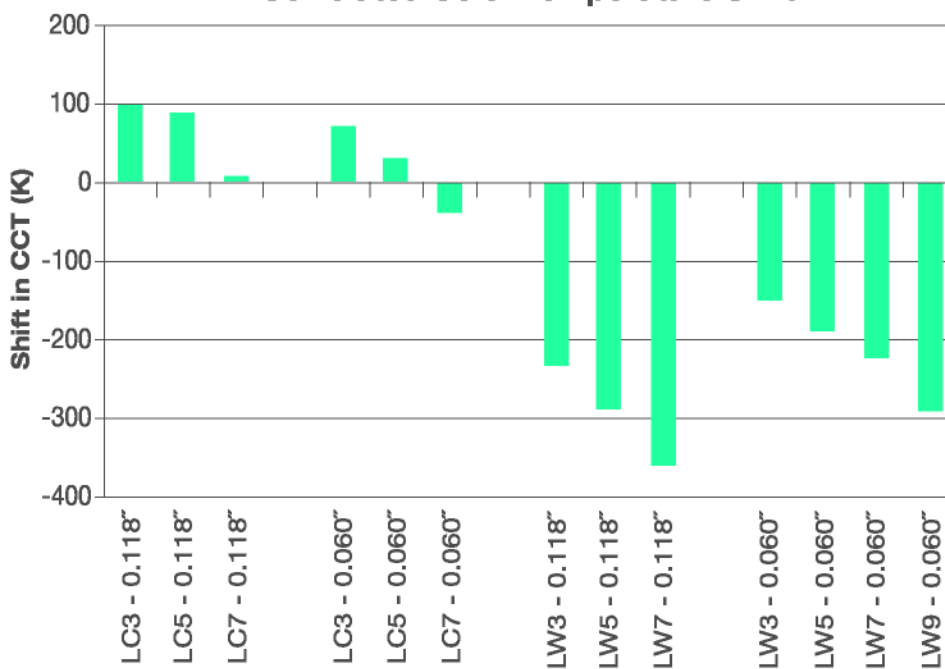

### Lumen XT Diffusion Grade and Thickness

This graph shows measured shifts in Correlated Color Temperature (CCT) of light from an LED light fixture with a diffuser sheet vs. the same LED fixture without a diffuser. The LED fixture's CCT without a diffuser is 6000 K.



**Covestro Deutschland AG**  
 Kaiser-Wilhelm-Allee 60  
 51373 Leverkusen Germania  
[www.sheeteurope.covestro.com](http://www.sheeteurope.covestro.com)  
[www.sheets.covestro.com](http://www.sheets.covestro.com)

DISTRIBUTORE

**MOHWINCKEL**

20090 Trezzano s. Naviglio  
 Via S. Cristoforo 78  
 Tel. 02 48401749 - Fax 02 4453847  
 e-mail: [comm@mohwinckel.it](mailto:comm@mohwinckel.it)